

NCFI – An Innovative Leader for Five Decades.

Since 1964, NCFI has been an industry leader and innovator of spray foam insulation and roofing systems solutions. NCFI's superior insulation and roofing technologies not only help families and commercial businesses save on heating and cooling costs, they have helped secure homes and commercial facilities against some of nature's harshest forces such as hurricanes. Additionally, we sell and service the equipment that enables these applications, assuring end users of a single, reliable support resource for their foam-in-place operations.

Highest Product Quality Available.

We start with the finest raw materials from proven, reliable sources to develop our high-quality, advanced spray polyurethane foam and premium acrylic coatings. Our high performance products must pass an array of quality control measures before ever reaching the job site. All ingredients are accurately weighed and blended for optimum performance for you. All systems are quality control tested for conformity to NCFI specifications. Our spray polyurethane foam is shipped from our manufacturing facilities to meet your special project requirements.

The Best Trained Applicators In The Business.

Before becoming a Gold Star Applicator, NCFI provides a comprehensive training program so contractors can meet and exceed the customer's needs. Our hands-on training covers all technical aspects of accurately applying spray polyurethane foam and how to properly operate spraying equipment with step-by-step procedures, parts information, and troubleshooting guides. NCFI's experienced staff can show contractors the most efficient way to apply our high-quality spray polyurethane foam and premium coatings to provide a high performance solution. Beyond product and equipment training, NCFI offers on-site technical representatives to help explore the best approach to solving your unique construction problems.



www.NCFI.com

NCFI Polyurethanes
A Division of BMC
P.O. Box 1528
Mount Airy, NC 27030

Phone: 800.346.8229
Fax: 336.789.9586
E-mail: moreinfo@ncfi.net



A whole new comfort level, for you and for the world.



InsulBloc® Commercial Insulation

A High-Performance Closed-Cell, Spray-In-Place Insulation Providing A Seamless Air Barrier And Dampproofing In One Application.


InsulBloc® Commercial Insulation

ABAA Approved

InsulBloc® Commercial Insulation

A High-Performance Closed-Cell, Spray-In-Place Insulation Providing A Seamless Air Barrier And Dampproofing In One Application.

For insulating exterior commercial walls or commercial cavity walls, there is no better choice than InsulBloc®. InsulBloc® is a 2 lb/ft³ density, spray-in-place closed-cell foam that forms a fully-adhered and seamless insulating, dampproofing, and air blocking membrane. InsulBloc® offers higher R-values per unit thickness than can be achieved with any other type of commercially available insulation. InsulBloc® can be applied to any commercial or construction material including concrete block, concrete, brick, steel, wood, laminates, and exterior sheathing boards, and it conforms to any design shape, insulating around brick ties, corners, angles and curves. InsulBloc leaves no gaps or joints, eliminating thermal bridging and thermal bypass associated with preformed boards.

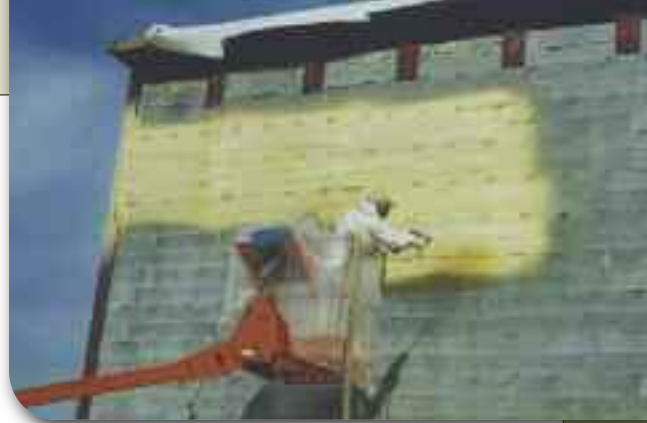

▲ InsulBloc® offers higher R-values and dampproofing.



◀ InsulBloc® adheres to CMU, poured concrete, primed steel, wood and most other construction materials.



◀ Use InsulBloc® in new construction or to give new life to older buildings.

The Problem

Exterior Commercial Walls

In traditional exterior commercial or concrete wall construction, high heat transfer of the commercial is very inefficient and provides a cold surface which can set up condensation situations leading to water damage and mold growth. Insulating with fiber based materials or rigid boards leaves seams and gaps in the thermal blanket. Additional materials must be used to provide the water seal and moisture vapor retarder.

Commercial Cavity Walls

In traditional commercial cavity wall construction, a dampproof coating is applied to the exterior of the concrete commercial unit (CMU) wythe followed by the installation of preformed insulation board between the brick ties or wall cladding attachments. This leaves gaps, breaks, and holes in the insulation at joints and penetrations. Preformed boards can restrict your design options, allowing for only flat walls and surfaces. Sealing joints of dissimilar building materials for air, water and heat infusion is also very difficult if not impossible.

The Solution

The InsulBloc® Commercial Insulation System. InsulBloc® is a closed-cell, spray-applied polyurethane foam insulation system that performs as a dampproofing and air barrier membrane. Spray-applied as a liquid, the insulation expands within seconds to form a seamless barrier that fills and seals large and small gaps, seams and penetrations. Joints between dissimilar materials, such as steel columns and commercial units, and joints between different building elements, such as roof decks and walls, are snugly sealed to prevent heat, air and moisture transfer. Building owners save energy; have healthier interior environments with reduced potential for mold growth. With InsulBloc®'s cost being about the same as conventional dampproofing and board insulation, it's easy to see why InsulBloc® has been used for over 40 years.

The End Result –


More than just insulation, InsulBloc® provides superior wall insulation offering high performance and exceptional value.

A wall covered with InsulBloc® spray foam will lower your energy costs, keep the occupants more comfortable and lower cost for repair and maintenance. Add up the benefits and it's easy to see that InsulBloc® is the commercial commercial solution you've been looking for.

How InsulBloc® Commercial Insulation Works

InsulBloc® In A Commercial Cavity Wall

Applied between the commercial block and brick face, InsulBloc® forms a fully adhered and seamless membrane that bridges and seals construction gaps and holes around penetrations while providing the highest R-value per unit thickness of any commercially available material plus provides an air barrier, a water barrier and a moisture vapor retarder.

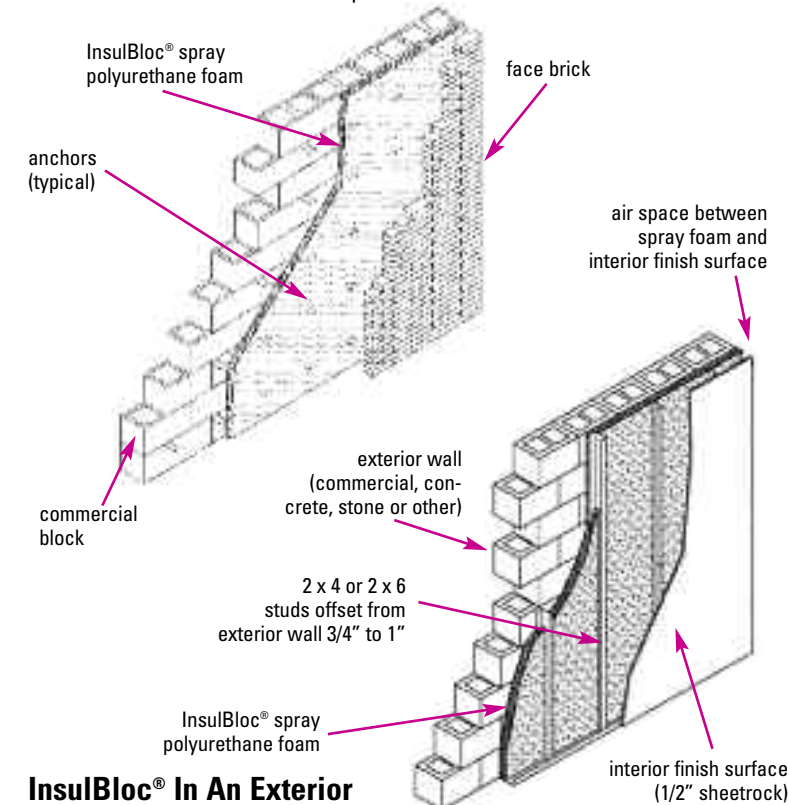

InsulBloc® In An Exterior Commercial Cavity Stud Wall

Design with the studs offset by 1" from the commercial wall. InsulBloc® is applied to the commercial surface, expanding out to form a seamless membrane, sealing between the wall and the studs. Additionally, the membrane seals the wall to floor and wall to roof deck joints. InsulBloc® has no thermal or moisture gaps resulting in superior thermal control with an air barrier and Class II vapor retarder. In one simple step, InsulBloc® provides multiple benefits.

InsulBloc Polyurethane Foam Typical Physical Properties*

Description:	Closed-cell spray polyurethane foam
Closed-cell content:	Greater than 90%
Density:	~1.9 to 2.1 lb./cu.ft. nominal (ASTM D 1622)
Compressive strength:	>25 psi (ASTM D 1621)
R-value:	>6.8 @1" (ASTM C 518)
Flame spread:	≤25 (ASTM E84)
Smoke development:	≤450 (ASTM E84)
Air permeance:	0.000 scfm/ft ² @ 1.57 psf (ASTM E 283)
Tensile strength:	>50 psi (ASTM D 1623)
Hydrostatic pressure resistance:	No Failure @ 54cm or 26in Head Pressure (AATCC 127)
Water Resistive Barrier	Pass (ASTM E331)

* Physical properties may change based on job specifications.

ARCHITECT BENEFITS

InsulBloc® high performance insulation provides architects with the highest quality spray foam technology on the market today, offering these benefits:

- **ABAA Approved** www.airbarrier.org
- **Adaptable** to uniquely shaped structures and difficult-to-insulate designs.
- **Easy to install** so the job is finished under budget and ahead of schedule.
- **Insulates, dampproofs and air seals** in one step creating a seamless membrane.
- **Watertight** within seconds of being applied. Seals roof to wall joints, blocking wind driven rain penetration.
- **FEMA Class 5** flood resistant material.
- **Environmentally friendly** using no harmful ozone-depleting chemicals – NCFI was awarded the EPA (Environmental Protection Agency) Stratospheric Ozone Protection Award.
- **Proven Performance** – for over 40 years, InsulBloc® has been used as a high performance insulation solution.
- **Building code compliant.**

BUILDING OWNER BENEFITS

InsulBloc® high performance insulation can save property owners money while making their building healthier and more comfortable.

- **Save** on your monthly energy bills.
- **Provides superior R-value** greater than 6 per inch, reducing both heating and cooling costs.
- **Creates an air barrier** that eliminates leaks and energy loss.
- **Provides a vapor retarder** that controls moisture problems.
- **Water barrier** that blocks wind driven rain preventing water damage and repair cost.
- **Improves indoor air quality** by keeping out dust and pollutants.
- **Reduces your energy consumption**, lessening your environmental impact.
- **Provides consistent interior temperatures** – no drafts, no cold or hot spots.
- **Reduces outside noise** by creating a seamless, airtight insulated barrier.
- **Never settles, shrinks, compresses or sags**, maintaining its insulation efficiency for the life of the building.
- **Proven insulating power** – spray polyurethane foam systems have been applied successfully for over 40 years.